

Muller 3C Free Cooling Potential

Model No. Flow Rate:	SH08-3C16 3.43L/s			SH08-3C26 6.95L/s			SH08-3C36 10.47L/s			SH08-3C46 13.90L/s		
Entering Water Temp (°C)	9	12	18	9	12	18	9	12	18	9	12	18
12°C DB / 9°C WB	n/a	15	49	n/a	32	105	n/a	47	157	n/a	61	204
10°C DB / 7°C WB	9	26	61	20	56	130	29	84	195	37	108	251
8°C DB / 6°C WB	15	32	67	33	70	143	49	105	215	63	134	278
4°C DB / 3°C WB	32	50	86	72	109	183	108	164	275	138	210	355
2°C DB / 2°C WB	39	56	91	86	123	197	129	185	296	164	236	382
0°C DB / 0°C WB	50	68	104	111	148	223	166	222	334	212	284	431

Model No. Flow Rate:	H08-3C24 13.42L/s			H08-3C26 15.76L/s			H08-3C34 20.11L/s			H08-3C36 23.84L/s			H08-3C46 32.05L/s		
Entering Water Temp (°C)	9	12	18	9	12	18	9	12	18	9	12	18	9	12	18
12°C DB / 9°C WB	n/a	62	210	n/a	73	249	n/a	91	310	n/a	107	367	n/a	146	499
10°C DB / 7°C WB	37	111	261	44	132	308	54	164	384	64	193	454	88	264	619
8°C DB / 6°C WB	67	141	291	79	167	344	98	208	429	116	245	507	159	335	690
4°C DB / 3°C WB	144	219	369	170	259	437	211	321	544	249	380	644	342	520	878
2°C DB / 2°C WB	174	249	399	206	295	474	255	366	589	301	432	697	413	592	951
0°C DB / 0°C WB	224	299	450	266	355	535	328	440	664	388	520	786	533	713	1073

Please Note:

These capacity figures are based on standard Melbourne selection criteria.


Muller Industries Australia

27 Hi Tech Court Kilsyth, Victoria Melbourne, Australia 3137


Telephone: +613 8761 6155 • Facsimile: +613 8761 6719 • Email: sales@mullerindustries.com.au

www.mullerindustries.com.au

Standard Setup

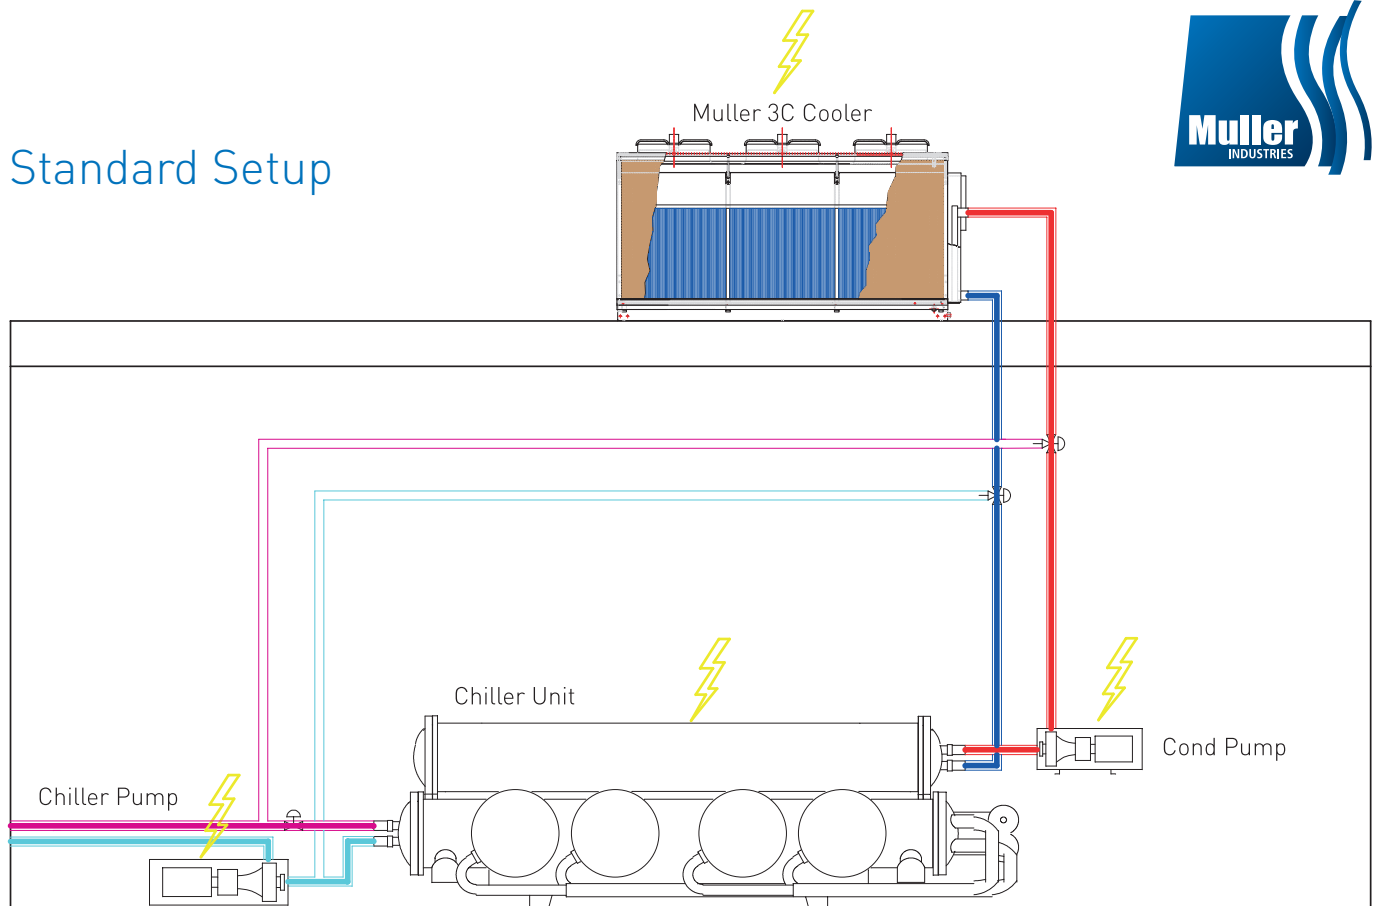

Free Cooling Setup

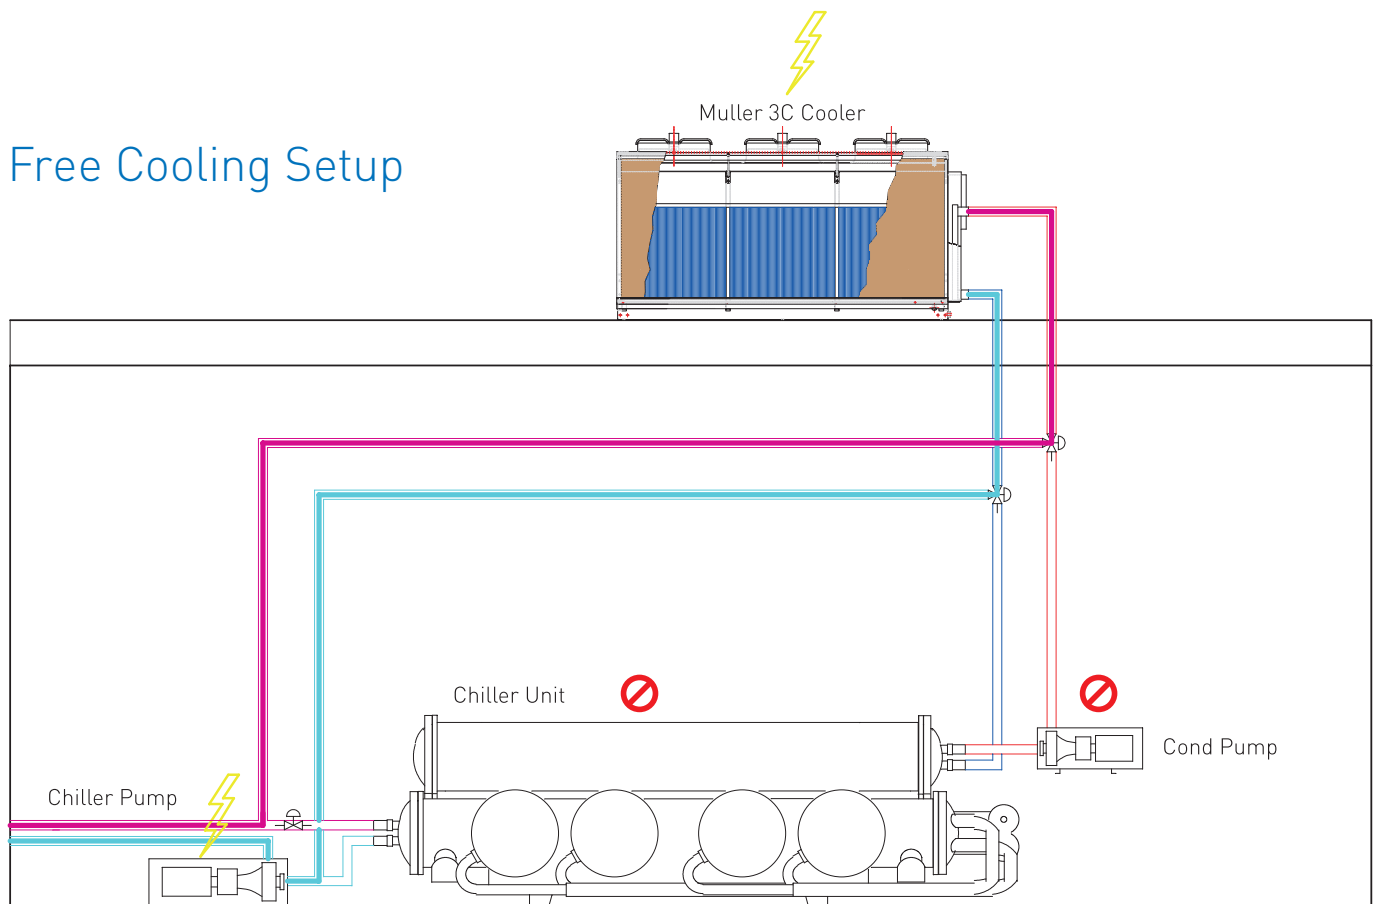

Muller Industries Australia

27 Hi Tech Court Kilsyth, Victoria Melbourne, Australia 3137

Telephone: +613 8761 6155 • Facsimile: +613 8761 6719 • Email: sales@mullerindustries.com.au

www.mullerindustries.com.au